




0432

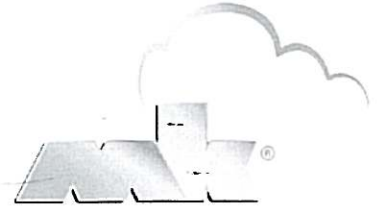

## EU DECLARATION OF CONFORMITY

The producer:

**MK Sp. z o.o.  
ul. Wiśniowa 24  
68-200 Żary, Poland**

according to directive 89/106/EEC for building products hereby declares that:

building product: **Construction elements of stainless steel chimney with insulating material layer MKDZ system**

from the producer's plant:

**MK Sp. z o.o.  
ul. Wiśniowa 24  
68-200 Żary, Poland**

Complies with the regulations of the norm EN 1856-1:2009 and it complies with the requirements for CE labelling according to annex ZA of EN 1856-1: 2009. norm. To determine the conformity, the procedures given in table ZA.4 were carried out.

For certification of factory production control, the following notified office was included:



Marsbruchstraße 186  
D-44287 Dortmund  
(Kenn- Nr. 0432)

The certificate of factory production control was issued with register number:

0432-CPD-219972-4

on 01.03.2010 with validity period for 5 years.

Żary, 28.09.2012

PROKURENT

*Kinga Pachnik*

Manager

PROKURENT

*Ireneusz Roman*



# Declaration of conformity and information on product

## "Requirements for metal chimneys"

Part 1 Components of chimney systems EN 1856-1:2009



Producer's identifier **MK Sp. z o.o.**  
**ul. Wiśniowa 24**  
**68-200 Żary, Poland**

Product denotation (trade name) **MKDZ System**

Name and function of the person in charge **Kinga Pachnik Procurator**  
**Ireneusz Koman Procurator**

Authorised unit **Materialprüfungsamt Nordrhein-Westfalen**  
 Certificate number / year **0432 -CPD- 219972-4 / 2010**

Documents denotation according to EN 1856-1 annex ZA fig. ZA 2

Metal chimney	EN 1856-1	T600	N1	D	V3-50080	G50	113-300	G75	350-450	G100	500	
Product denotation												Multiply system of carrying away combustion gases, version with thermal insulation 60mm, ventilated full length, without lining
Norm number												Sections / fittings of metal system of carrying away combustion gases
Temperature class												Mechanical loads resistance
Pressure class												Maximum loads: according to technical documentation
Condensate resistance (W: wet or D: dry)												Resistance of flow
Corrosion resistance												Mean roughness: 1.0 mm
Combustion gas Material of the pipe carrying away combustion gases												Thermal resistance
Soot fire resistance G: yes / O: no / Distance to combustible material [mm]												0,67 m <sup>2</sup> KW at 200°C
Nominal diameter (Ø) Inner pipe) [mm]												Flexural strength
												Slant positioning : Maximum deviation between two supports: 3m at 63°
												Wind load: free-standing end 2m above last clamping
												Maximum distance of horizontal clamping: 2m
												Variable resistance to frost-humidity: yes